




DR. B. PITTALUGA & C. s.r.l

STATIC MIXER WP for turbulent flow

Exceptional mixing power and excellent quality - price ratio!



Dimensions and executions:

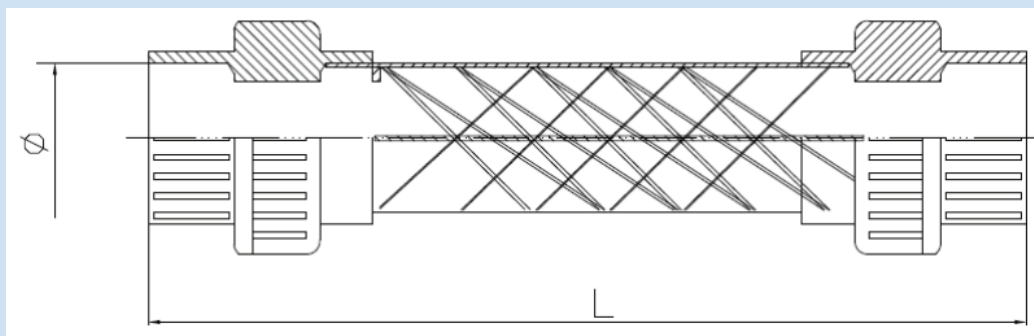

Shell in transparent PVC, PVC connectors, EPDM seals and mixing elements in PP.
Max working pressure 4 bar g.
Max working temperature 45°C.


Connections with glued nozzles

CODE	ATTACHMENTS	L mm
WP 25 BI	D25 (DN20)	210
WP 32 BI	D32 (DN25)	230
WP 50 BI *	D50 (DN40)	347 / 385
WP 63 BI *	D63 (DN50)	360 / 405

*available with attachments for additive 1/2" GAS F

Connection with threaded nozzles

CODE	ATTACHMENTS	L mm
WP ¾" BF	¾"	210
WP 1" BF	1"	230
WP 1 ½" BF	1 ½"	347
WP 2" BF	2"	360

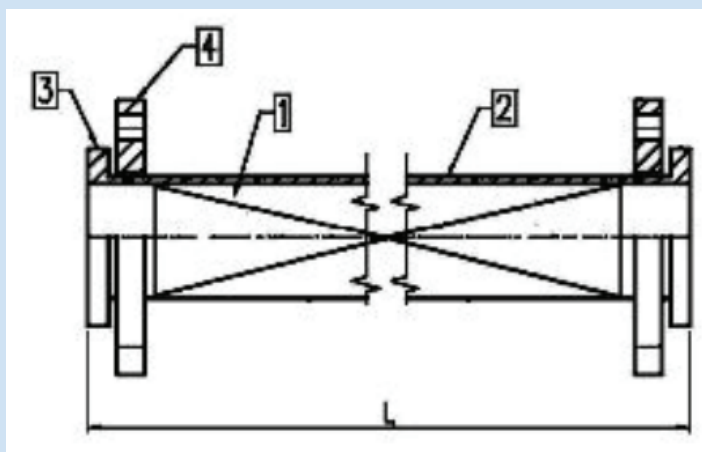

Shell in PVC, mixing elements in PP and flanges in reinforced PP PN10.
Max working pressure 8 bar g. - Max working temperature 45°C.

CODE	ATTACHMENTS	L mm
WP 25 F PVC	DN 25	180
WP 40 F PVC	DN 40	230
WP 50 F PVC	DN 50	260

Shell and mixing elements in PP and flanges in reinforced PP PN10.
Max working pressure 8 bar g. - Max working temperature 60°C.

CODE	ATTACHMENTS	L mm
WP 25 F PP	DN 25	180
WP 40 F PP	DN 40	230
WP 50 F PP	DN 50	260